





# GATEMASTER SELECT PRO WELD IN LONG THROW KEYLATCH



SPECIFICATION  
SHEET  
**SWKLLT**

-  Gate will lock shut and will require the key to open every time.
-  Stainless steel latchbolt which springs a unique 22mm (7/8") into the gate post. Long throw for extra security.
-  Supplied with bolt guide plate and gate post strike plate to ensure extra smooth closing action.
-  Adjustable latchbolt for precise fitting. Easy to rotate for LH and RH gates.




## PRODUCT DETAILS

Product code:	Description:
SWKLLT1630	For 30mm (1-1/8") wide gate frames
SWKLLT1640	For 40mm (1-5/8") wide gate frames
SWKLLT1650	For 50mm (2") wide gate frames
SWKLLT1660	For 60mm (2-3/8") wide gate frames

Latchbolts: Adjustable, latchbolt springs 22mm (7/8").

Perfect for both left handed and right handed gates.

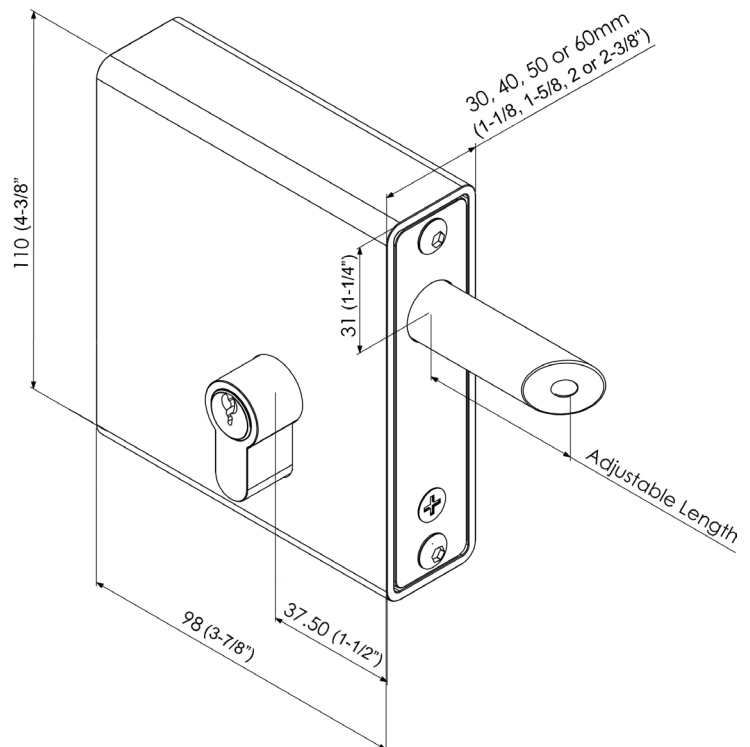

## INSTALLATION

- Disassemble the lock by removing the 3 screws from the face plate of the lock, remove the face plate, and then remove the euro cylinder (twist the key 15 degrees clockwise or anti-clockwise to release). The insides of the lock will then slide out.
- Weld the lockcase to the gate and galvanise or paint as part of the gate.
- Fit the lock and eurocylinder into the lockcase and secure with screws.
- MAINTENANCE** Every two months, lubricate the latchbolt with light oil. Annually, dismantle lock and spray the mechanism inside with light oil.



 **GATEMASTER**

VISIT [GATEMASTERLOCKS.COM](http://GATEMASTERLOCKS.COM) FOR MORE INFORMATION