


SELECT PRO BOLT ON QUICK EXIT



- The quick exit no access ensures a fast and secure one-way exit system.
- Stainless steel adjustable latchbolt which extends 13/16" into the gate post.
- Supplied with bolt guide plate and gate post strike plate.
- Allows exit only, with no outside entry for added security. Ideal for gates requiring one-way access.
- A security shroud is also available to prevent access to the push pad from the outside.




PRODUCT DETAILS

Product code: | Description:


Key access on one side, push pad on the other

SBQEL01NA	Left Hand to fit 3/8" to 1 3/16"
SBQER01NA	Right Hand to fit 3/8" to 1 3/16"
SBQEL02NA	Left Hand to fit 1 1/2" to 2 1/4"
SBQEL02NA	Right Hand to fit 1 1/2" to 2 1/4"


Marine grade: Salt spray tested for 1000 hours.
Latchbolts: Adjustable, latchbolt springs 22mm (7/8").

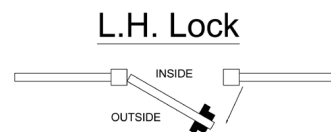

L.H. Lock




R.H. Lock



INSTALLATION

- Drill 2 x 9mm (3/8") dia. holes at 92mm (3-5/8") centres for M8 fixing bolt.
- Drill 18mm (3/4") clearance hole for latchbolt at 22mm (7/8") centres down from the top 9mm hole.
- Fix lock in place using stainless steel clamp plate, bolt support plate and 2 stainless steel countersunk fixing bolts supplied.
- Drill clearance hole in keep or outer frame to receive the latchbolt. Slot this hole vertically to allow for gate sag. Fit strike plate by either welding or screw fixing to the gate post.
- Ensure latchbolt moves freely without binding on gate or frame.
- MAINTENANCE** Every two months, lubricate the latchbolt with light oil. Annually, dismantle lock and spray the mechanism inside with light oil.

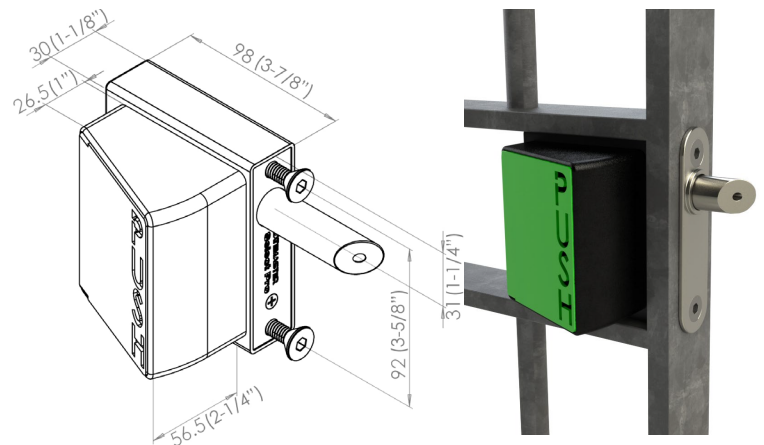

Check out our Gatemaster Locks channel to view installation videos!



VISIT GATEMASTERLOCKS.COM FOR MORE INFORMATION